



CLEANSOURCE® XT MMS UPS MODULAR UPS SYSTEMS

60Hz | 480V | FLYWHEEL TECHNOLOGY

G-SERIES 250kW TO 500kW | Z-SERIES 250kW TO 2000kW



CLEANSOURCE® XT MMS MODULAR UPS SYSTEMS

Overview

CLEANSOURCE® XT MMS Modular UPS System offers a wide range of modular and redundant back-up power systems from 250kW to 2000kW.

The built-in flywheel energy storage takes up less than half the footprint of battery-based systems, delivers efficiency up to 98% and lowers total cost of ownership by up to 40% over the life of the product.


This field-proven technology is based on a highly fault tolerant IGBT architecture designed to protect all critical loads, such as data centers, industrial processes and health care applications. Stored energy will provide ride-through up to 2 minutes depending upon configuration, making the CLEANSOURCE® XT MMS a clear alternative to modular static UPS systems reliant on battery storage.

The CLEANSOURCE® XT MMS Modular UPS System has more than enough energy storage for diesel starting and synchronization, even when paralleling generating sets. Elimination of batteries saves space and weight, reduces site testing and maintenance and removes the need for routine replacement after a few years of service life.


Parallel Online Architecture

The CLEANSOURCE® XT MMS Modular UPS is based on Active Power's Parallel Online Architecture which provides excellent isolation between input and output, while delivering Class 1 voltage regulation and dynamically cancelling effects of non-linear load harmonics.

This topology continuously provides online power protection to your operation, creating a clean sinusoidal output waveform and protecting critical operations against all nine IEEE power disturbances in a power dense, reliable, and energy-efficient package.

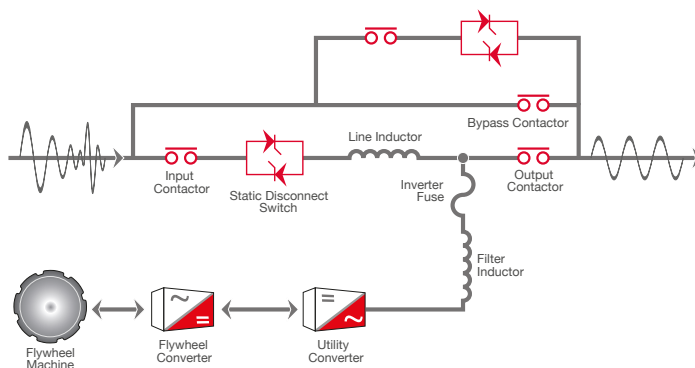

FLYWHEEL TECHNOLOGY

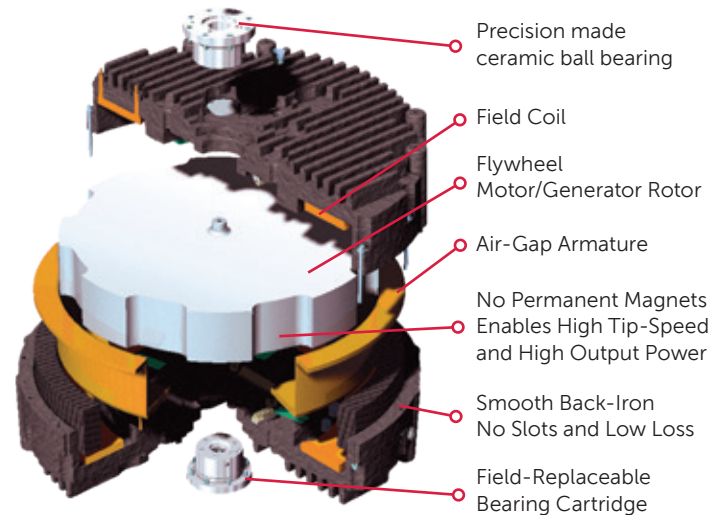

- ▶ STORES 6.2 MJ OF ENERGY
- ▶ UP TO 2 MINS. OF RUN-TIME (LOAD DEPENDENT)
- ▶ WIDE OPERATING TEMPERATURE RANGE
FROM 0°C TO 40°C
- ▶ HIGH DENSITY, HIGH EFFICIENCY DESIGN

KEY BENEFITS AND FEATURES

- ◉ UP TO 98% EFFICIENT
- ◉ HALF THE SPACE OF LEGACY BATTERY-BASED UPS
- ◉ FIELD EXPANDABLE
- ◉ REDUNDANT FANS AND CONTROL POWER UNITS
- ◉ LOWER COOLING REQUIREMENTS
- ◉ LOWER MAINTENANCE AND SERVICE
- ◉ COST-EFFECTIVE INSTALLATION
- ◉ COLOUR LCD TOUCH SCREEN DISPLAY
- ◉ REMOTE MONITORING
- ◉ BUILT-IN POWER FACTOR CORRECTION
- ◉ GENERATOR COMPATIBILITY
- ◉ DUAL INPUT AND INTEGRATED MAINTENANCE BYPASS OPTION
- ◉ SEISMIC PROVISIONS – CONSULT FACTORY
- ◉ 20-YEAR DESIGN LIFE
- ◉ 250kW BUILDING BLOCKS EXPANDABLE TO 2MW

40%

TCO SAVINGS

PERMANENT ENERGY STORAGE

UP TO 98% ENERGY-EFFICIENT

LESS EXPENSIVE TO INSTALL
AND COMMISSION

12x

LESS LIKELY TO FAIL

MOST RELIABLE ENERGY
STORAGE SYSTEM

MINIMIZE RISK AND DISRUPTION
FROM MAINTENANCE
AND REPLACEMENT

9x

LESS CARBON EMISSIONS

90% LESS CARBON USED
IN UPS MANUFACTURE

OVER 40% LESS CARBON
EMITTED OVER 20 YEARS

CLEANSOURCE® XT MMS combines a competitive initial cost with lower ongoing operational expense – up to 40% lower than traditional UPS over 20 years. The result is a dramatic TCO benefit for your application, with net savings.

► SUPERIOR ENERGY EFFICIENCY

Over 96% efficient at 40% load.

► REDUCED COOLING NEEDS


No need for dedicated cooling for batteries

► LOWER MAINTENANCE REQUIREMENTS

Routine annual check-up and bearing change every third year.


► NO BATTERY CHANGES

Integrated flywheel with 20-year life.

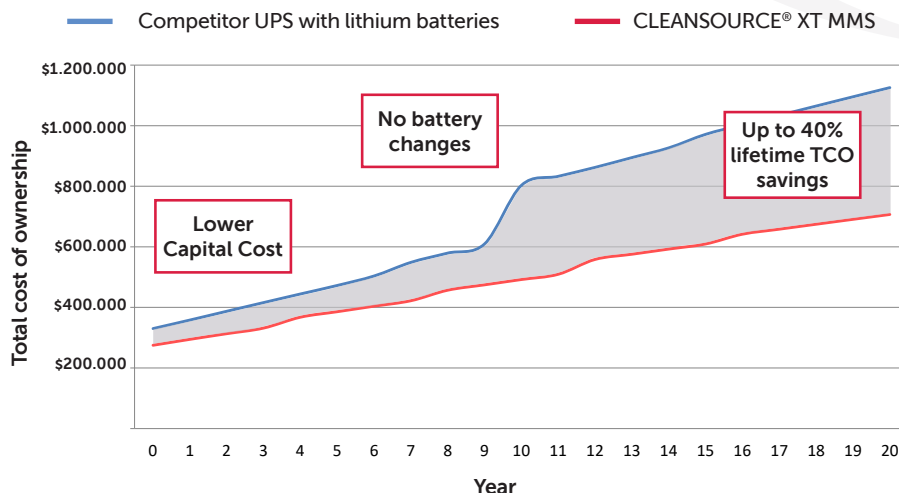

Modular and Scalable Architecture

CLEANSOURCE® XT MMS G and Z Series UPS systems are modular and capable of multiple redundancy levels. Customers may readily expand their systems in line with their own growth needs by adding further modules over time. Each system consists of an input/output cabinet (IOC), a system cabinet (SC) and the ability to connect up to four 250kW modules with built-in wireway. In total, 8 modules can operate in a single system, providing up to 2000kW of high efficiency, battery-free UPS power. CLEANSOURCE® XT MMS G Series UPS can be configured up to 500kW N+1. CLEANSOURCE® XT MMS Z Series UPS can be configured up to 2000kW.

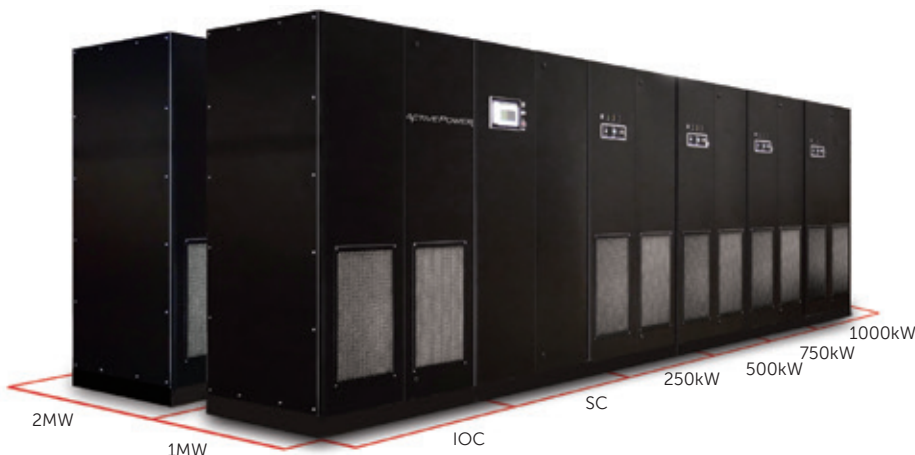

60Hz | 480V

PRODUCT SPECIFICATIONS

MODEL		XT 250 G	XT 500 G	XT 250 Z		XT 500 Z		XT 750 Z	XT 1000 Z	
RATING										
Maximum kVA		275	550	275		550		825	1100	
Maximum kW		250	500	250		500		750	1000	
INPUT										
Voltage ¹		480 VAC 3-phase, 3-wire plus ground (4 wire optional)								
Voltage Range		+10% / -15% (programmable)								
Frequency		60 Hz +/- 10% maximum (programmable) +/- 3% (default)								
Power Factor		0.99 at rated load and nominal voltage								
Harmonic Current	Linear load	<2% at 100% load								
Distortion	Non-linear	<8% at 100% load								
Current – Nominal (480 VAC)		312A	623A	311A		623A		934A	1245A	
Current – Max. Continuous		400A	800A	400A		800A		1200A	1600A	
Current – Max. Non-Continuous		420A	840A	420A		840A		1260A	1680A	
Surge Withstand		Meets IEEE 587/ANSI C62.41								
Walk-in		1 to 15 seconds (programmable)								
OUTPUT										
Voltage		480 VAC 3-phase, 3-wire plus ground (4-wire optional)								
Voltage Regulation	Steady State	+/-1% for +/-10% input								
	Flywheel Mode	+/-1% steady state								
	Transient	+/-1% within 50 mSec for 100% load step								
Voltage Distortion ²		<1% linear loads and <5% for 100% non-linear loads								
Frequency		60Hz (mains synchronized) (normal operation +/- 0.2% free running)								
Slew Rate		Adjustable from 0.2Hz/second to 3.0Hz/second								
Current – Nominal (480 VAC)		331A	662A	331A		662A		992A	1323A	
Overload Capability-Mains Operation				Cont. 105%	10 min <110%	5 min <125%	1 min <150%	10s <200%	Imd. >200%	
Efficiency – Energy Storage Online		97.5%								
ENERGY STORAGE										
Type		Integrated Steel Flywheel spinning at 10,000RPM								
Flywheel Run Time (% Load)		100% 75% 50% 25% 24.5s 32s 47s 84s								
Flywheel Recharge Time ³		< 3 min (nominal) at 65kW								
GENERAL										
Internal Maintenance Bypass Panel		Yes (optional)					No (external only)			
N+1 Redundant Module		Yes (optional)								
OSHPD Seismic Rated		Consult factory								
ENVIRONMENTAL										
Audible Noise		<80 dBA at 1 metre								
Operating Temperature		32 to 104°F (0 to 40°C)								
Storage Temperature		-13 to 158°F (-25 to 70°C)								
Humidity		5% to 95% (non-condensing)								
Altitude		Up to 3,000ft (914m)/ 1.2°C derating for every 1,000ft (304m) above 3,000ft (914m)								
Emissions and Immunity		FCC Clas A, EN 62040-2								
Heat Rejection – Online		6.4kW / 21,851BTU/Hr	12.8kW / 43,701BTU/Hr	6.4kW / 21,851BTU/Hr	12.8kW / 43,701BTU/Hr	19.2kW / 65,552BTU/Hr	25.6kW / 87,402BTU/Hr			
PHYSICAL DATA										
Height		78.0in/1,981mm Excl. Wireway. 96.0in/2,438mm Inc. Wireway								
Width		127.0in/3,226mm	170in/4,318mm	127.0 in / 3,226 mm		170 in / 4,318 mm		213.0 in / 5,410 mm	256.0 in / 6,502 mm	
Depth		34.0in/865mm	34.0in/865mm	34.0in/865mm		34.0in/865mm		34.0 in / 865 mm	34.0 in / 865 mm	
Weight		6,375lbs / 2,892 kg	10,875 lbs / 4,933 kg	6,750 lbs / 3,063 kg		11,250 lbs / 5,103 kg		15,750 lbs / 7,144 kg	20,250 lbs / 9,185 kg	
Cable Entry		Top or Bottom								
Safety		UL/cUL 1778 and CAN/CSA 22.2 No.107.1 Listed								

¹ From grounded WYE source

² EN 62040-3

³ kW recharge value is per flywheel.



Active Power Inc. 2128 West Braker Lane, Austin, TX 78758

Active Power Inc. is a division of the Pillar Group

activepower.com

Pillar Australia | Pillar China | Pillar France | Pillar Germany | Pillar India | Pillar Italy | Pillar Singapore | Pillar Spain | Pillar UK | Pillar USA