


## ADJUSTABLE AND ADAPTABLE FOR UNIVERSAL DEPLOYMENT

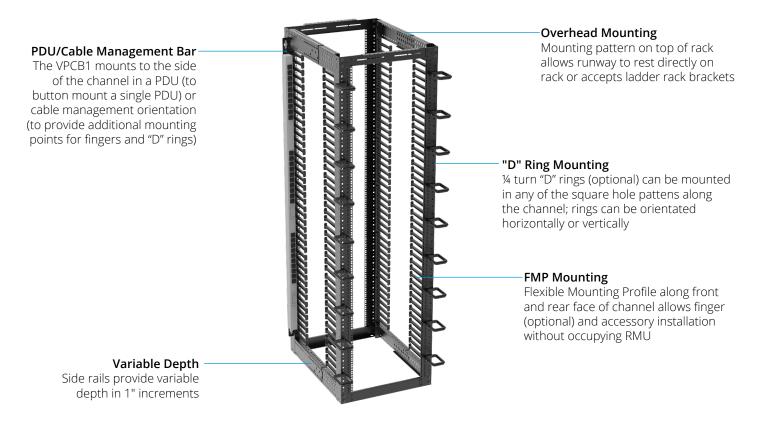


Height	Color	Mounting	Example
VRX-xxU2436	X-	XXXX-	Configured VRX
45	<b>B</b> (Black)	<b>1224</b> (tapped 12-24)	VRX-45U2436-B-1224
52	<b>W</b> (White)	<b>SQM6</b> (3/8" sq. M6)	
59			

## **FEATURES**

- #12-24 tapped or 3/8" sq. (M6) channels (with RMU markings) for 19" and 23" mounting
- Square hole pattern and FMP pattern along the front and rear face of channels accept "D" rings and fingers for horizontal cable support
- Side rails provide variable depth in 1" increments, 24-36"D
- Self squaring assembly with toe-in or toe-out orientation
- · Weight capacity 2500 lbs.
- · Standards: UL2416, RoHS II



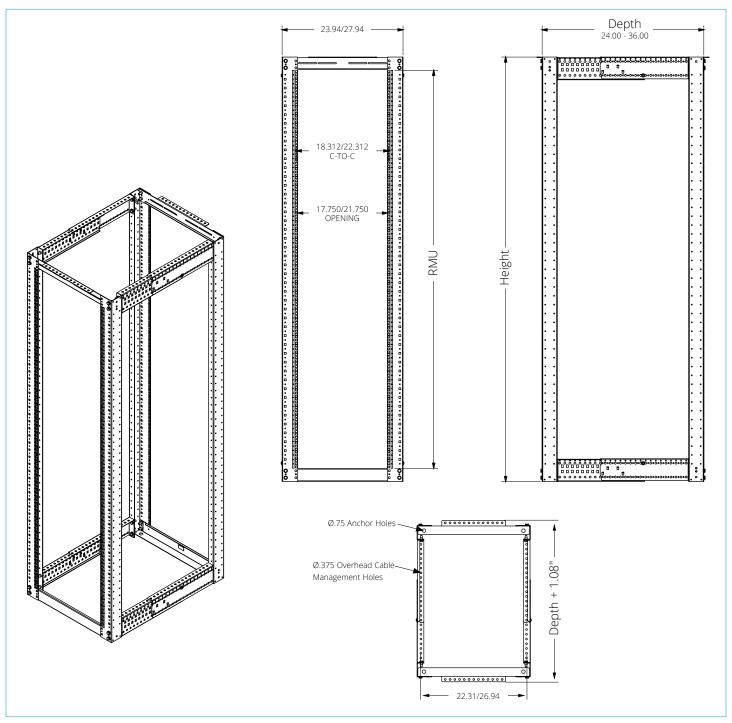

## **POPULAR ACCESSORIES**

Part No.	Description	
ESC-K12-7	7" x 7 RMU, set of 12 finger sections; mount along FMP	
CM-11	3"W x 5"D, set of five rings; mount along FMP	
CM-25	1.5" x 3.5", set of 10 rings; mount along rack uprights	
CM-26	3.5" x 5", set of 10 rings; mount along rack uprights	
PDU2	One pair of brackets with 2 mounting positions for PDUs; mount along FMP	
VPCB1	Single power cable bar; mount along FMP	
Vertical Cable Managers	Front only and front/rear VCMs available	

